


Tiger Paw™ Roof Deck Protection

Help protect your home and roof system from damaging moisture with premium roof deck protection



- Provides a critical layer of extra protection between your shingles and roof deck to resist wind-driven rain (or moisture from other sources)
- Offers longer-lasting protection than conventional asphalt felts (which can rot or become brittle over time)
- Avoids wrinkling and buckling for a better-looking finished roof

Tiger Paw™ Roof Deck Protection

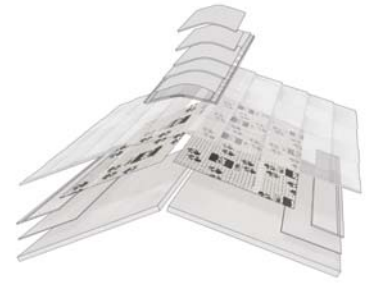

Benefits:

- **Premium non-asphaltic, polypropylene construction** for long-lasting protection
- **Specially designed walking surface** and anti-skid back coating help provide excellent walkability for installers
- **Moisture-control design** helps remove damaging moisture from the roof deck unlike typical synthetic non-breathable underlayments¹
- **Provides at least 600% (i.e., 7 times) greater tear strength²** and 147% higher nail-pull strength than conventional #30 asphalt felt³
- **48" (1.22 m) wide roll provides 33% more coverage** per course than conventional 36" (914 mm) wide asphalt felts
- **Light-gray surface** is cooler to work on in hot weather than conventional black felts
- **Eligible for up to a Lifetime limited warranty** when used on Lifetime Shingle roofs⁴ and it's an eligible component of GAF residential enhanced warranties

Product Details:

Nominal Specifications:

For use with asphaltic shingles and may also be used with slate, wood, metal, or tile.⁵

- **Roll size:** 10 squares (1,000 sq. ft. [92.9 m²]) per roll (excludes laps)
- **Roll length:** 250' (76.2 m)
- **Roll width:** 48" (1.22 m)
- **Aprox. roll weight:** 40 lb. (18 kg)
- **UV exposure:** UV-stabilized polypropylene construction resists UV degradation for up to 180 days⁶

Code Approvals and Standards:

- Meets or exceeds the physical requirements of ASTM D226 and D4869
- Miami-Dade County Product Control approved
- State of Florida approved
- ICC-ES ESR-3286
- CSA A123.3
- UL Listed to ANSI/UL 790 Class A when used with UL Class A shingles
- Listed with Texas Department of Insurance as an acceptable alternate roof underlayment

¹ As per GAF ASTM D570-modified testing

² GAF trapezoidal tear strength testing per ASTM D4533

³ GAF nail pull-through testing per ASTM D3462.

⁴ See *GAF Shingle & Accessory Limited Warranty* for complete coverage and restrictions. The word "Lifetime" refers to the length of coverage provided by the *GAF Shingle & Accessory Limited Warranty* and means as long as the original individual owner(s) of a single-family detached residence [or the second owner(s) in certain circumstances] owns the property where the shingles and accessories are installed. For owners/structures not meeting the above criteria, Lifetime coverage is not applicable. Lifetime Limited Warranty on accessories requires the use of at least three qualifying GAF accessories and the use of Lifetime Shingles.

⁵ Contact GAF Technical Support at 1-800-766-3411 for acceptable non-asphaltic roofing systems and limited warranty coverage.

⁶ 180-day UV resistance refers to standardized testing conducted to ensure the product will not physically degrade when exposed to UV. It is NOT related to withstanding water, snow, or wind. While Tiger Paw™ Roof Deck Protection is water resistant, it is NOT WATERPROOF. DO NOT USE Tiger Paw™ Roof Deck Protection as a temporary roof to protect property or possessions.

Note: Always use plastic cap nails or staples with plastic caps to install Tiger Paw™ Roof Deck Protection. Do NOT use nails or staples without caps.



To learn more about the Lifetime Roofing System visit gaf.com/Lifetime



We protect what matters most™

